

● 主要数据 Main technical data:

认证 Certification | 防爆标志 Ex mark | 符合标准 Meet the standard

China (PCEC Ex)	Ex de IIC T6 Gb	GB3836 GB12476
IECEX	Ex de IIC T6 Gb Ex t IIIIC T 80°C Db	IEC60079
ATEX	Ex de IIC T6 Gb Ex t IIIIC T 80°C Db	EN60079

适用范围：用于1区、2区、21区和22区

Intended use: Can be used in zone 1, zone 2, zone 21 and zone 22

使用环境温度：-40°C ≤ Ta ≤ 55°C

Ambient temperature use: -40°C ≤ Ta ≤ 55°C

防护等级：IP66 (配合操作头)

Degree of protection: IP66 (Match operation head)

额定电压：最大输入电压 200VDC 或者额定功率，
取其中的最小值

Rated voltage : 200VDC or power rating, whichever is smaller

额定功率：0.1W

Rated power: 0.1W

刻度：0 ~ 100%


Scale: 0 ~ 100%

电缆引入外径：Φ 5.5 ~ 13mm

Cable entry outer diameter: Φ 5.5 ~ 13mm

符合：CE 0575

Conformity to: CE 0575




● 订购规格 Order specifications:

电阻值 Resistance value	订购号 Order No.
100 Ω	CZ0203-DW 901
200 Ω	CZ0203-DW 902
500 Ω	CZ0203-DW 903
1000 Ω	CZ0203-DW 904
2000 Ω	CZ0203-DW 905
5000 Ω	CZ0203-DW 906
10000 Ω	CZ0203-DW 907
20000 Ω	CZ0203-DW 908
50000 Ω	CZ0203-DW 909
100000 Ω	CZ0203-DW 910
200000 Ω	CZ0203-DW 911
500000 Ω	CZ0203-DW 912
1000000 Ω	CZ0203-DW 913
2000000 Ω	CZ0203-DW 914

● 外形尺寸 Outline dimensions:

● 面板式安装外形尺寸

The outline dimensions for panel mounting

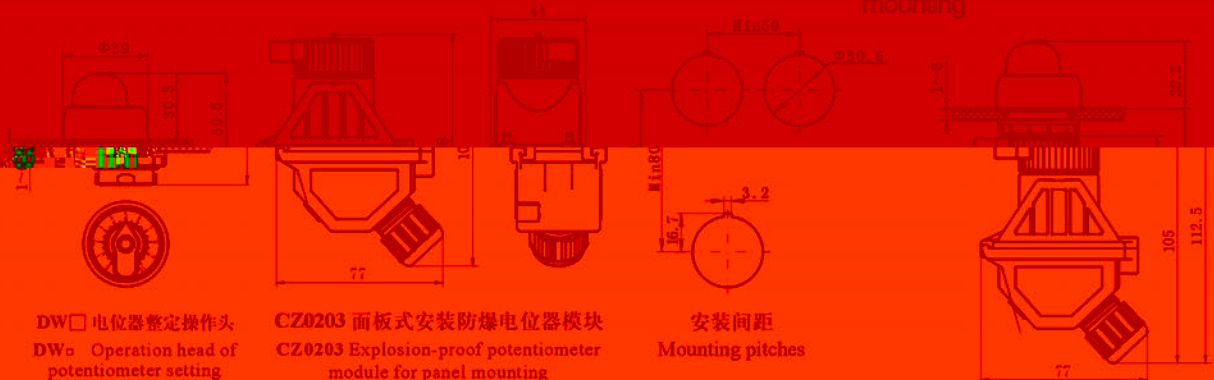

DW□ 电位器整定操作头
DW□ Operation head of potentiometer setting

CZ0203 面板式安装防爆电位器模块
CZ0203 Explosion-proof potentiometer module for panel mounting

安装间距
Mounting pitches