



描述:

全塑三防组合电源插座箱外壳采用耐冲击的玻璃纤维增强聚脂材料制成，能承受最极端的工业运行条件，外壳盖和基座的结合面设计成凹凸形，设有发泡硅橡胶密封结构，确保了 IP65 防护等级。

全塑箱体内部装有防腐电器元件模块，面板式插座安装在箱壁上，根据需要可组成不同的回路数、不同电压、电流等级。主开关额定电流最大可达 180A。

组合电源箱除现有的方案外，可按要求设计制造。

- 模块化设计
- 透明操作窗方便操作
- 面板设有操作机构

Descriptions:

The enclosure of full plastic weather-proof combined power socket boxes is made of glass fibre reinforced polyester which is resistant to impact. It is able to subject to the inverse industrial operating conditions. Concave-convex joint is designed between the cover and body to mount an air-foam silicone bar, which secure degree of protection IP65.

The full plastic box houses anti-corrosion electric component module. The panel type socket is impact installed on the wall. Different number of loops, voltage, and current may be composed according to requirements. The rated current of the main switch is up to 180A.

Besides the present designation for the Combined power socket boxes it can be designed and manufactured according to requirements.

- Combined modular design.
- Transparent operation window make operation convenient.
- There is an operation mechanism on the panel.

● 主要数据 Main technical data:

防腐标志: WF2

防护等级: IP65

频率: 50/60Hz

使用环境温度: $-40^{\circ}\text{C} \leq \text{Ta} \leq 55^{\circ}\text{C}$

外壳材料: 玻璃纤维增强聚脂 (SMC)

Corrosion-proof mark: WF2

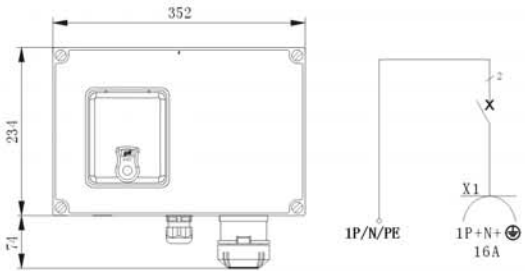
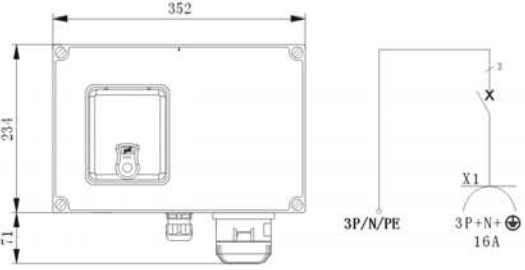
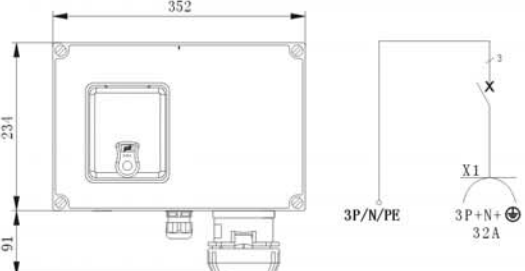
Degree of protection: IP65

Frequency: 50/60Hz

Ambient temperature use: $-40^{\circ}\text{C} \leq \text{Ta} \leq 55^{\circ}\text{C}$

Material of enclosure: Glass fibre reinforced polyester (SMC)

● 订购规格 Order specifications:

方案/电气原理图 Method / Electrical principle diagram	描述 Description	订购号 Order No.
	<p>1 个断路器 16A/1P+N 1 个三防插座 16A/3P 200V-250V 6h 1 个塑制电缆密封套 M25 电缆外径: $\Phi 8 \sim 17\text{mm}$</p> <p>One circuit breaker 16A/1P+N One weather-proof socket 16A/3P 200V-250V 6h One full plastic cable gland M25 Cable outside diameter: $\Phi 8 \sim 17\text{mm}$</p>	<p>M0551 0110 0001</p>
	<p>1 个断路器 16A/3P 1 个三防插座 16A/5P 220V/380V 6h 1 个塑制电缆密封套 M25 电缆外径: $\Phi 8 \sim 17\text{mm}$</p> <p>One circuit breaker 16A/3P One weather-proof socket 16A/5P 220V/380V 6h One full plastic cable gland M25 Cable outside diameter: $\Phi 8 \sim 17\text{mm}$</p>	<p>M0551 0110 0002</p>
	<p>1 个断路器 32A/3P 1 个三防插座 32A/5P 220V/380V 6h 1 个塑制电缆密封套 M40 电缆外径: $\Phi 17 \sim 28\text{mm}$</p> <p>One circuit breaker 32A/3P One weather-proof socket 32A/5P 220V/380V 6h One full plastic cable gland M40 Cable outside diameter: $\Phi 17 \sim 28\text{mm}$</p>	<p>M0551 0101 0003</p>



M0551全塑三防组合电源插座箱

M0551 Full plastic weather-proof combined socket boxes

订购规格: 全塑三防组合电源插座箱



M0551全塑三防组合电源插座箱

M0551 Full plastic weather-proof combined socket boxes

订购规格 0.1m 0.2m 0.3m 0.4m 0.5m 0.6m 0.7m 0.8m 0.9m 1.0m 1.1m 1.2m 1.3m 1.4m 1.5m 1.6m 1.7m 1.8m 1.9m 2.0m

0.1m